


Temperature and salinity package



Dimensions	81 x 70 x 40 cm
Weight	8 kg
Payload Capacity	3 kg
Range (basic)	2 km or 1 hour
Range (extended)	4 km or 2 hours
Communication	LTE, ISM
Sensor interfaces	RS232, RS485 (MODBUS), ETH
Speed	1 m/s

Payload features

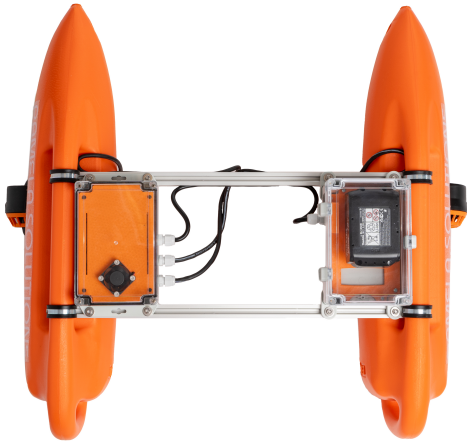


Aqualabo C4E sensor ensures accurate conductivity and salinity readings in most water applications, even in challenging conditions

Range: 0 to 200 mS/cm

Live data stream in real time, log exported directly to mobile phone from radio controller

salinity data example

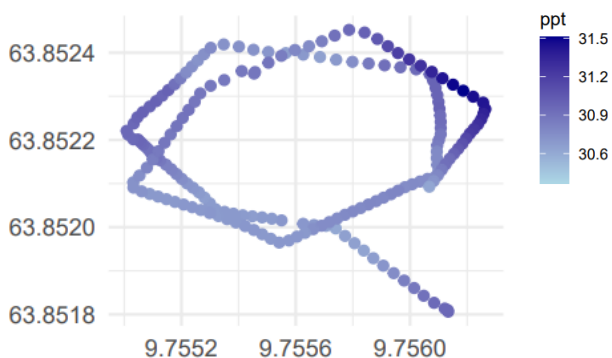

Operation modes

Manual operation with radio controller

Autopilot operation with user-programmed route using QGroundControl software on remote control tablet